

CHILD RESTRAINT SYSTEM INFORMATION

MODEL **LB619 (NEX360)**

GROUP **0+ / 1 / 2 / 3**

BRAND **CROLLA**



0090332


UNR TESTING INFORMATION

Regulation	ECE R44/04
Approval Number	E8*44R04/16*11983*00
CTA Reference Number	JPJ.BKA.600-3/3/ Jld 78 (6)
CTA Approval Date	10 NOVEMBER 2020

INSTALLATION TYPE

Installation Type/ Direction	Seatbelt	ISOFIX	Top Tether	Support Leg
Rear Facing	N/A	✓	✓	N/A
Forward Facing	N/A	✓	✓	N/A

PHOTOS

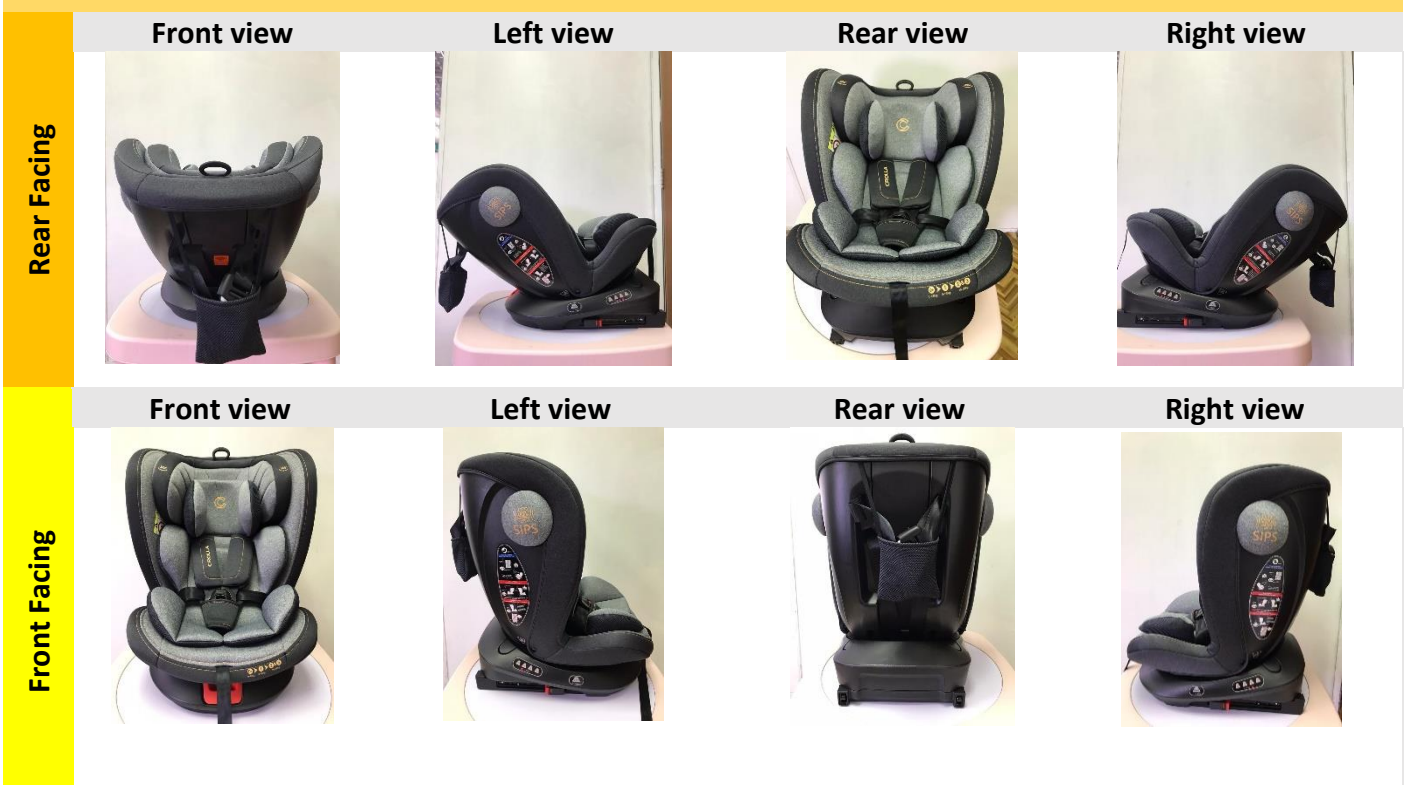

CHILD RESTRAINT SYSTEM INFORMATION

COLOUR VARIANT



INSTALLATION

Group

Installation Method

0/0+
Up to 83cm
0-13kg

4.1 Installation of rearward-facing using ISOFIX + the top tether (Group 0+/1, Weight 0-18KG)

▲ IMPORTANT: Do not use forward facing before the child's weight exceeds 9KG.



- Step 1: Turn the child restraint system to the position facing the vehicle door, and then install the child restraint system to the vehicle seat with ISOFIX. Attached ISOFIX to the ISOFIX anchorage system (see page 9, 3.7), and hear a "click" sound, the ISOFIX indicator will turn into GREEN.



- Step 2: Place the child on the child restraint system and insert buckle into the slot. As you hear a "click" sound, check whether the buckle is locked. (See page 7, 3.4)



- Step 3: Rotate the seat to the opposite direction as shown in picture;


04

INSTALLATION

CHILD RESTRAINT SYSTEM INFORMATION

0/0+
Up to 83cm
0-13kg

Take the top tether strap out (see page 11, 3.9), go through one side of seat, engage the top tether hook to the designated position of your car seat.

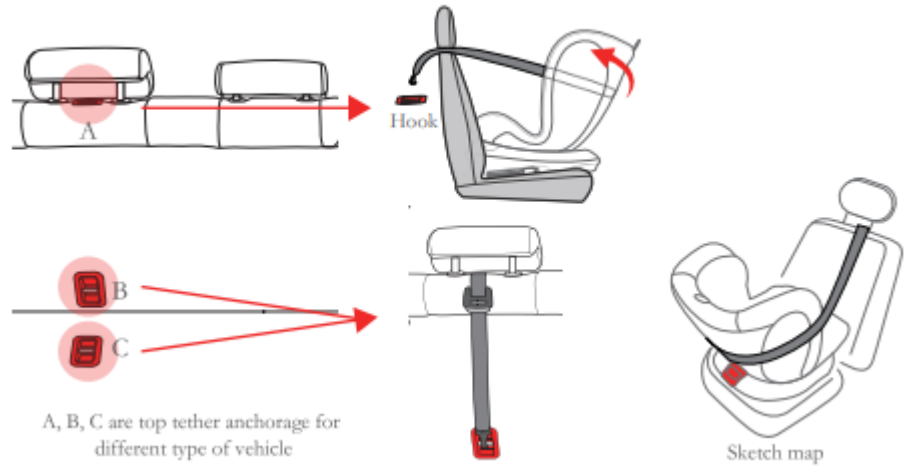


4.2 Installation of forward-facing using ISOFIX + the top tether (Group I, Weight 9-18KG)

▲ IMPORTANT: Please remove the Triangle sponge.



- Step 1: Put the child restraint system on the car seat, make it close to the car seat. Fixing ISOFIX to the ISOFIX attachment (see page 9, 3.7) until hearing the "click" sound, and the ISOFIX indicator will turn green;

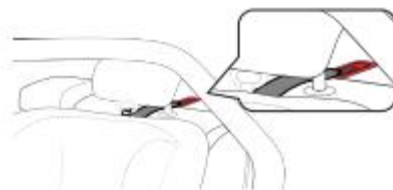

- Step 2: Engage the top tether hook to the designated top tether anchorage of your car.
Note: Tighten the top tether strap until the color of the top tether strap adjuster turns green.



- Step 3: Place the child on the child restraint system, and then secure the child with a five-point safety belt (see page 6, 3.3 and 3.4).

1
71cm and above
9-18kg

CHILD RESTRAINT SYSTEM INFORMATION

2
100cm and above
15-25kg

&

3
Up to 135cm
25-36kg

4.3 There are two types of installation method during forward-facing installation (Group: II / III, suitable for weight 15-36KG)

▲ IMPORTANT: Please remove the cushion, Triangle sponge crotch pad, buckle, chest pad and the shoulder straps.




For "semi-universal" category child restraint, fixed with FIX + adult three-point seat belt.



- Step 1: Put the child restraint system on the car seat, make it close to the car seat. Fixing ISOFIX to the ISOFIX attachment (see page 9, 3.7) until hearing the "click" sound, and the ISOFIX indicator will turn green;



- Step 2: Engage the top tether hook to the designated top tether anchorage of your car. Note: Tighten the top tether strap until the color of the top tether strap adjuster turns green.

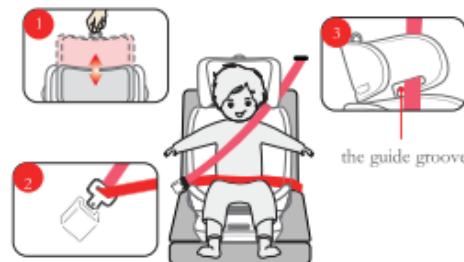

- Step 3: Place the child on the child restraint system.
- Adjust the headrest height to ensure that the headrest is at the child's shoulder level and fixed well;
- According to the installation path shown on the left, insert the car seat belt into the car groove of the car seat and then buckle it up;
- Make sure that the car seat belt strap passes through the guide groove of the headrest;
- Make sure the car seat belt is not slack or twisted.

For "universal" category child restraint, fixed with adult three-point seat belt.



- Step 1: Put the child restraint system on the car seat.



- Step 3: Place the child on the child restraint system.
- Adjust the headrest height to ensure that the headrest is at the child's shoulder level and fixed well;
- According to the installation path shown on the left, insert the car seat belt into the car groove of the car seat and then buckle it up;
- Make sure that the car seat belt strap passes through the guide groove of the headrest;
- Make sure the car seat belt is not slack or twisted.